



PREPARED FOR
Alex & Morgan Carter
alex.carter@example.com
(231) 555-0148

SERVICE PROPERTY
1847 Pine Ridge Lane
Traverse City, MI 49686
Basement and foundation

ESTIMATE DETAILS
Issued Aug 9, 2026
Valid through Sep 8, 2026
Prepared by Josh Aldrich

RECOMMENDED PROJECT PLAN

Basement Waterproofing & Foundation Stabilization

Control active moisture at the perimeter, provide dependable sump discharge, stabilize the affected wall, and clean impacted surfaces so the basement is dry, strong, and ready to use.

PROJECT INVESTMENT

\$18,940.00

Materials, labor, equipment, protection, and cleanup

Deposit to schedule	\$4,735.00
Balance at completion	\$14,205.00
Estimated duration	4-6 days

What this plan accomplishes

A plain-language overview before the detailed scope



Manage water

Capture perimeter seepage and route it to a dedicated sump and exterior discharge.



Strengthen the wall

Reinforce the affected foundation wall and seal documented cracks.



Restore a healthy space

Use containment, HEPA cleaning, and botanical treatment on impacted surfaces.

Scope at a glance

Detailed quantities and descriptions begin on page 2

01	Moisture control and drainage Interior perimeter system, sump equipment, and exterior discharge	\$7,880.00
02	Foundation stabilization Carbon-fiber reinforcement and crack repair	\$5,040.00
03	Mold and surface treatment Containment, air filtration, HEPA cleaning, and treatment	\$3,170.00
04	Site protection and completion Protection, debris handling, final cleanup, and documentation	\$2,850.00

Simple next steps

No hunting through a 159-page estimate maze

1

Review

Confirm the recommended scope and any optional upgrades.

2

Authorize

Sign the secure Work Authorization sent to your email.

3

Deposit

Use the secure Square payment link to reserve scheduling.

4

Schedule

Floodman confirms the project window and arrival details.



DETAILED SCOPE OF WORK

Included services, materials, and quantities

Customer pricing only. Internal cost, markup, and price-list data stay private.

SCOPE ITEM	QUANTITY	AMOUNT
01 MOISTURE CONTROL AND DRAINAGE		
Interior perimeter drainage system Open the slab edge as required, install drainage channel and stone, connect to the sump basin, and restore the work edge.	92 LF	\$4,140.00
Sump basin and primary pump system Install basin, sealed lid, primary pump, check valve, and dedicated discharge connection.	1 system	\$2,480.00
Exterior discharge and termination Route discharge to the approved exterior location with freeze-aware termination.	1 project	\$1,260.00
Moisture control subtotal		\$7,880.00
02 FOUNDATION STABILIZATION		
Carbon-fiber wall reinforcement Prepare masonry and install reinforcement straps at RoomFlow-marked locations.	6 EA	\$4,620.00
Foundation crack sealing Prepare and seal documented non-structural cracks within the work area.	3 EA	\$420.00
Foundation stabilization subtotal		\$5,040.00
03 MOLD AND SURFACE TREATMENT		
Containment and HEPA air filtration Establish work-area controls and operate HEPA-filtered air equipment during cleaning.	1 project	\$1,180.00
Detailed HEPA surface cleaning HEPA vacuum affected accessible surfaces before treatment.	650 SF	\$975.00
Plant-based antimicrobial treatment Apply treatment to the prepared accessible surface area.	650 SF	\$1,015.00
Mold and surface treatment subtotal		\$3,170.00
04 SITE PROTECTION AND COMPLETION		
Floor, access-path, and contents protection Protect adjacent finished surfaces and establish a controlled work route.	1 project	\$640.00
Selective removal, bagging, and haul-away Remove listed affected materials and dispose of project debris.	1 project	\$1,310.00
Final cleanup, moisture verification, and photos Clean the work zone, verify accessible conditions, and attach completion documentation to the job record.	1 project	\$900.00
Site protection and completion subtotal		\$2,850.00

Project subtotal	\$18,940.00
Sales tax	\$0.00
Total project investment	\$18,940.00



ROOMFLOW PROJECT PLAN

Measured work areas and installation points

Generated from the saved property sketch, not rebuilt by hand

Basement Level - Proposed Work Plan

Diagram is illustrative and not an engineering drawing

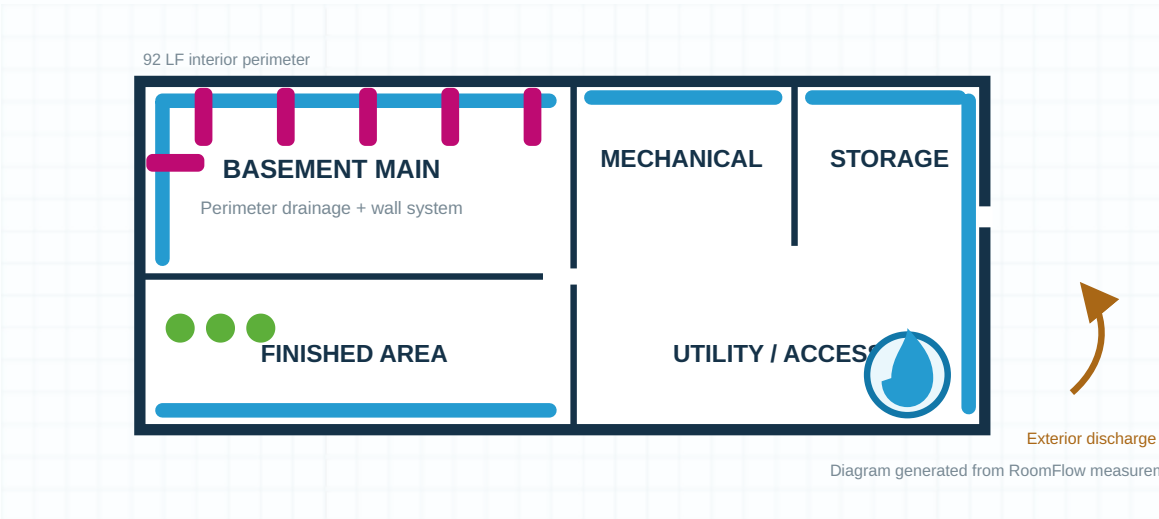


Diagram generated from RoomFlow measurements

PROJECT ASSUMPTIONS

What this estimate is based on

- Accessible conditions observed during the inspection and recorded in RoomFlow
- Normal access to electricity, water, and the listed work areas
- Work performed during the agreed project window
- Quantities may be field-verified before final installation

NOT INCLUDED UNLESS LISTED

Items outside this price

- Concealed conditions not reasonably visible at inspection
- Finish carpentry, painting, or flooring beyond listed restoration
- Hazardous-material abatement outside the documented scope
- Owner-requested changes after authorization

Included project protections

- Controlled work area and protected access path
- Daily housekeeping within the active work zone
- Debris removal and final photo documentation

Available options, not included

- Backup sump pump system
- Wi-Fi pump and high-water monitoring
- Permanent basement dehumidifier

Change orders stay intentional. Any approved scope change receives its own description, price, and signature before it changes the Gauzy project total or final invoice.

Insurance detail stays available without burying the homeowner. A full carrier or Xactimate-style line-item export may be attached as an appendix when required, while this document remains the clean client summary.



APPROVAL AND PAYMENT

A clear path from estimate to scheduled work

Legal terms remain in the signed Work Authorization

TOTAL PROJECT

\$18,940.00

Approved scope shown in this estimate

DEPOSIT REQUESTED

\$4,735.00

Due after electronic authorization

ESTIMATED DURATION

4-6 days

Final dates confirmed after scheduling

Payment and authorization summary

RoomFlow, Documenso, Square, and Gauzy remain linked to one project

APPROVAL PATH

Ready to protect your property?

Floodman sends a secure Work Authorization for electronic signature. After it is signed, the Square deposit request reserves the project for scheduling.

Total project

\$18,940.00

Deposit requested

\$4,735.00

Remaining balance

\$14,205.00

What approval records

No silent edits after the customer signs

BEFORE WORK BEGINS

Authorization package

- Estimate number and revision
- Customer, service property, and approved scope
- Deposit amount and payment terms
- Electronic signature date and audit record

AFTER APPROVAL

Project record

- Signed Work Authorization stored with the job
- Square payment linked to the Gauzy project ledger
- Any later change uses a separate signed change order
- Completion and warranty documents remain attached

Your total does not change casually. A revised price appears only through a clearly described and approved revision or change order.

Warranty, questions, and acceptance

Customer service details stay visible at the moment of decision

Warranty and service documents

Applicable workmanship and product-specific warranty terms are included with the Work Authorization and remain attached to the Floodman customer and project record.

Questions before approval?

Call (231) 935-4921 or reply to the estimate email. Your estimator can explain any line without changing the saved scope behind the document.

Customer signature / electronic signature record

Date

Floodman representative

Date